



HOPPERS

Pro120

Features

- **STANDARD STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **3¼" FULLY WELDED FRAME**
- **FULLY WELDED SASH**
- **SILL EXPANDER**
- **HEAVY DUTY CAM LOCKS**
engineered beauty, strength, and safety. Used the force of an impacted window sash to absorb and work with the impact driving sash to frame. Security peace of mind
- **INTEGRAL EXTRUDED LIFT HANDLE**
the lift rail (or handle) as an integral part of the sash extrusion increases the strength of the window and allowing ease of opening & closing

Think about this:
The spacer system you choose is just as important as the window!
That's why we use:

Super Spacer
SEALED



inside view

MANUFACTURING LIMITS

MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY ¼" INCH

MINIMUM WIDTH 14 ¼" MINIMUM HEIGHT 13 ½"

MAXIMUM WIDTH 36" MAXIMUM HEIGHT 32"

MAXIMUM WIDTH + HEIGHT = 68" UI

Window Options

also available in
CLEAR GLASS
and
**Privacy Plus Performance
OBSCURED GLASS**



Grids are installed between the glass panes during manufacturing for easy cleaning

GRID DETAILS for traditional grids


GRIDS PATTERNS



FLAT GRIDS




CONTOUR GRIDS

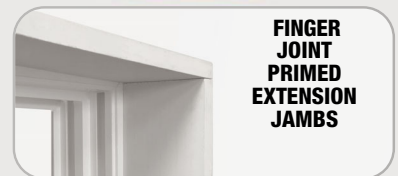

FINGER JOINT PRIMED EXTENSION JAMBS



NAILING FIN

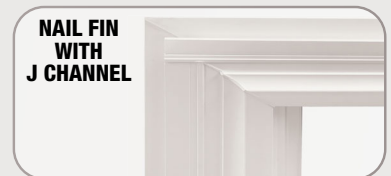

NAIL FIN WITH J CHANNEL