



HOPPERS

Pro140

Features

- **STANDARD STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **3 1/4" FULLY WELDED FRAME**
- **FULLY WELDED SASH**
- **SILL EXPANDER**
- **HEAVY DUTY CAM LOCKS**
engineered beauty, strength, and safety. Used the force of an impacted window sash to absorb and work with the impact driving sash to frame. Security peace of mind
- **INTEGRAL EXTRUDED LIFT HANDLE**
the lift rail (or handle) as an integral part of the sash extrusion increases the strength of the window and allowing ease of opening & closing

Think about this:

The spacer system
you choose is just as important as the window!
That's why we use:

Super Spacer
SEALED



inside view

MANUFACTURING LIMITS

MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY 1/8" INCH

MINIMUM WIDTH 14 3/4" MINIMUM HEIGHT 13 1/2"

MAXIMUM WIDTH 36" MAXIMUM HEIGHT 33"

MAXIMUM WIDTH + HEIGHT = 69" UI

Window Options

also available in
CLEAR GLASS
and

Privacy Plus Performance
OBSCURED GLASS



Grids are installed between the glass panes
during manufacturing for easy cleaning

GRID DETAILS for traditional grids


GRIDS PATTERNS




FLAT GRIDS



CONTOUR GRIDS

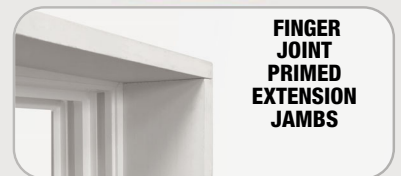

**FINGER
JOINT
PRIMED
EXTENSION
JAMBS**

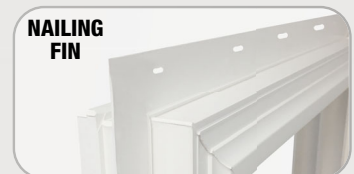

**NAILING
FIN**



**NAIL FIN
WITH
J CHANNEL**