




3 LIGHT SLIDER

Pro130

available in equal configuration 1/3 - 1/3 - 1/3 or unequal configuration 1/4 - 1/2 - 1/4

Features


- **STANDARD STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **SILL EXTENSION** with dual durometer for ease of installation
- **DOUBLE LOCKS** included on heights of 27½" and over
- **CENTER SASH** is fixed
- **LEFT & RIGHT SASH SLIDE**
- **3¼" FULLY WELDED FRAME**
- **FULLY WELDED SASH**
- **FULL INTERLOCK** at the meeting rail
- **LIFT OUT SASH** for easy cleaning from the inside
- **EXTRUDED** ½ screen with **BETTER VUE®** screening in sash ends

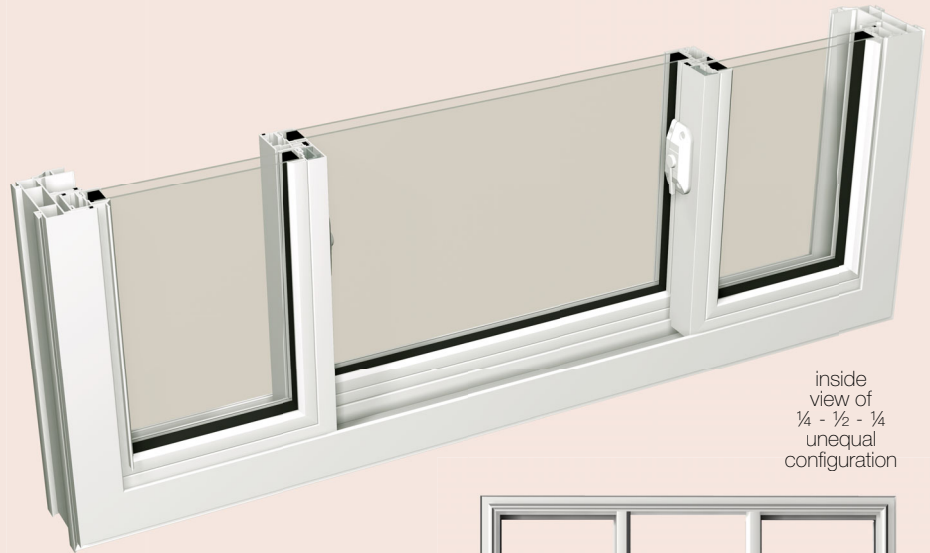

inside view of 1/4 - 1/2 - 1/4 unequal configuration



Equal Configurations 1/3 - 1/3 - 1/3

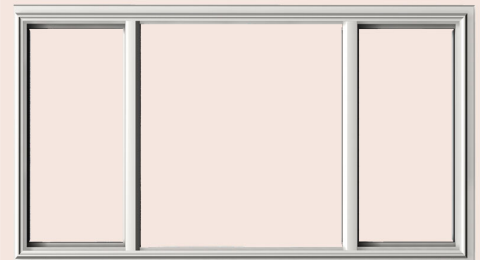

Unequal Configurations 1/4 - 1/2 - 1/4

Think about this:
The **spacer system** you choose is just as important as the window!
That's why we use:

Super Spacer®
SEALED

MANUFACTURING LIMITS	
MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY 1/8" INCH	
1/3 - 1/3 - 1/3 MINIMUM WIDTH 34"	1/3 - 1/3 - 1/3 MAXIMUM WIDTH 100"
1/4 - 1/2 - 1/4 MINIMUM WIDTH 43½"	1/4 - 1/2 - 1/4 MAXIMUM WIDTH 100"
BOTH - MINIMUM HEIGHT 14¾"	BOTH - MAXIMUM HEIGHT 64"
MAXIMUM WIDTH + HEIGHT = 162 UI	

Window Options

also available in **CLEAR GLASS** and **Privacy Plus Performance OBSCURED GLASS**

Grids are installed between the glass panes during manufacturing for easy cleaning

GRID DETAILS for traditional grids

GRIDS PATTERNS

FLAT GRIDS **CONTOUR GRIDS**

FINGER JOINT PRIMED EXTENSION JAMBS

NAILING FIN

NAIL FIN WITH J CHANNEL