



# DOUBLE HUNG

**Pro150**



## Features

- **STANDARD STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **TRUE SLOPED SILL** construction for ease of cleaning & positive drainage
- **SILL EXTENSION** with dual durometer for ease of installation
- **EXTRUDED** ½ screen with **BETTER VUE®** screening (provides improved visibility, enhanced insect performance, air flow and light transmission)
- **RIGID ALUMINUM** sash reinforcement
- **CONSTANT BALANCE SYSTEM** made with high yield stainless steel for strength and durability
- Energy Efficient **FOAMED PROFILES**
- **DOUBLE LOCKS** included on widths of 27½" and over
- **BALANCE COVERS**
- **¾" FULLY WELDED FRAME**
- **UPGRADE to ENERGY STAR V7 with TRIPLE GLAZING**

Think about this:

The spacer system you choose is just as important as the window!

That's why we use:

*Super Spacer*  
**SEALED**



inside view

MANUFACTURING LIMITS	
MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY ¼" INCH	
MINIMUM WIDTH 14¾"	MINIMUM HEIGHT 24¾"
MAXIMUM WIDTH 48"	MAXIMUM HEIGHT 76"
MAXIMUM WIDTH + HEIGHT = 116 UI	



## Window Options

### EXTERIOR PAINTED COLORS

(interior color is white or wood grain)



### INTERIOR WOOD GRAIN COLORS


(wood grain color choices - natural oak or cherry)

NATURAL OAK

CHERRY

### STANDARD STRENGTH TRIPLE PANE

Two panes of Low-E glass and one pane of clear glass with argon gas in both chambers



### Privacy Plus Performance OBSCURED GLASS



Grids are installed between the glass panes during manufacturing for easy cleaning

**GRIDS PATTERNS AVAILABLE**



CONTOUR GRIDS


FLAT GRIDS



**FINGER JOINT PRIMED EXTENSION JAMBS**



**NAILING FIN**

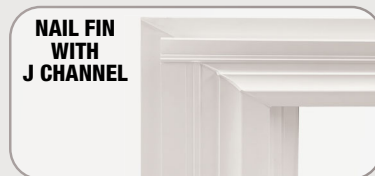

**NAIL FIN WITH J CHANNEL**